



## Fixed Transfer Tub Bench - CA416-2SD (R / L) – Specifications

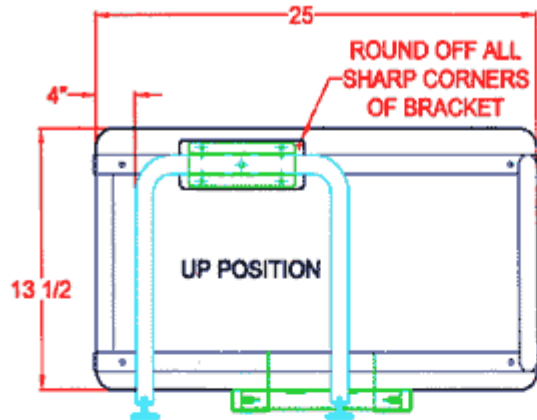

RIGHT SIDE SEAT SHOWN

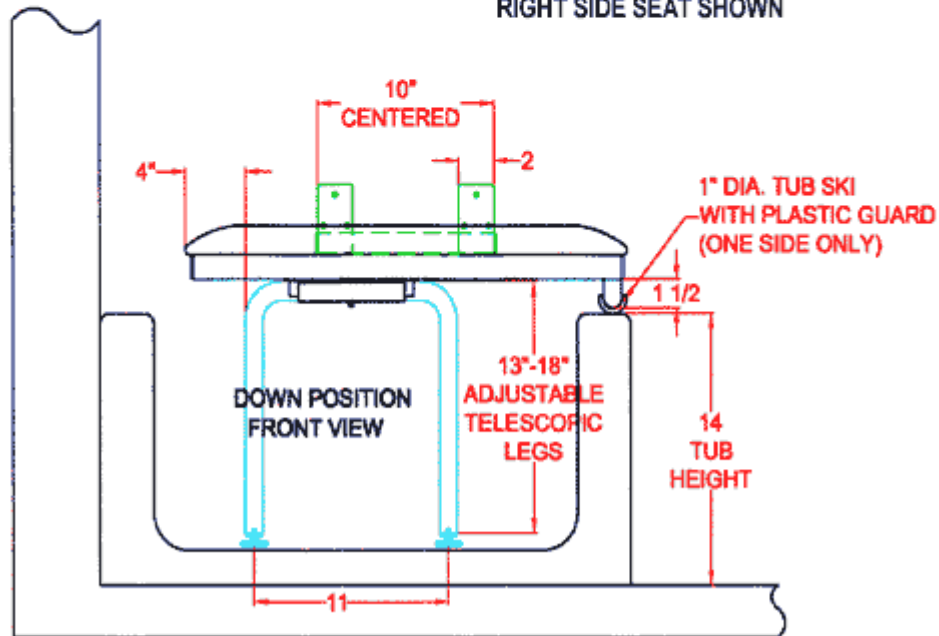

CA416-2SD (R / L)

### Operation:

Seat is held in a raised position by a tension rod placed in the rear crossmember. When seat is lowered into the down position, the swing down leg automatically locks into place with a push-pin button.

### Architectural Specifications:

Model # CA416-2SD (R or L)

**Frame:** Type 304 (18-8) S.S. Tube, 1-1/4" (32mm) x 18ga. (1.2mm) sq. mainframe with 1" (25mm) x 18ga. (1.2mm) rd. cross members. Leg: H-shaped yoke of type 304 (18-8) S.S. tubing, 1" (25mm) x 18ga. (1.2mm) rd. tubing. Heliarc welded to 1-1/4" (32mm) rd. x 12ga. (2.7mm) frame hinge. The swing down legs level when seat is lowered to a sitting position. The seat safely stays in raised position by a tension rod inside the rear crossmember.

### Materials:

**Frame:** Type 304 (18-8) S.S. Tube, 1-1/4" (32mm) x 18ga. (1.2mm) sq. mainframe with 1" (25mm) x 18ga. (1.2mm) rd. cross members.

**Wall Flanges (2):** Type 304 (18-8) S.S. – 3 Mounting holes in each flange.

**Swing Down Legs:** H-shaped yoke of type 304 (18-8) S.S. tubing, 1" (25mm) x 18ga. (1.2mm) rd. tubing. Heliarc welded to 1-1/4" (32mm) rd. x 12ga. (2.7mm) frame hinge couplings.

### Seat Choices: (Designated when ordering)

NW or NA – White (NW) or Almond (NA) Naugahyde covering 2" (51mm) foam mounted on 1/2" (13mm) marine plywood.

PW, PA or PT – White (PW), Almond (PA), or Teak (PT) finish – Phenolic 1/2" (13mm) x 3" (76mm) slats bolted to frame with SS screws.

HW – White High Density Polyethylene (HDPE) 1/2" (13mm) thick, bolted to frame with SS screws.

### Installation:

All Shower Seats must only be installed using suitable fasteners and sufficient in-wall backing materials. ADA mounting height for seat in lowered position is 17" (432mm) to 19" (482mm).

Compliance Alliance  
P.O. Box 566  
Palmyra, VA 22963